

Lasting Connections

WELDING SOLUTIONS FOR OIL & GAS DOWNSTREAM



LASTING CONNECTIONS

As a pioneer in innovative welding consumables, Böhler Welding offers a unique product portfolio for joint welding worldwide. More than 2000 products are adapted continuously to the current industry specifications and customer requirements, certified by well-respected institutes and thus approved for the most demanding welding applications.

Our customers benefit from a partner with

- » the highest expertise in joining, rendering the best application support globally available
- » specialized and best in class product solutions for their local and global challenges
- » an absolute focus on customer needs and their success
- » a worldwide presence through factories, offices and distributors

SPECIALIZED WELDING CONSUMABLES FOR THE OIL & GAS DOWNSTREAM INDUSTRY

Böhler Welding has more than 30 years of experience in the production of welding consumables for critical process equipment (CPE) and furnace tubes for demanding applications. Amongst others, we provide best-in-class CrMo and CrMoV welding consumables, fulfilling and often exceeding the requirements of relevant API recommended practices, the applicable codes, as well as the specifications used in the industry. They feature excellent toughness at low temperature, high resistance to temper embrittlement, creep resistance and all the needed mechanical properties.

We supply weld overlay solutions for a wide number of alloys, including innovative single layer and high speed strip cladding, with proven corrosion resistance and disbonding properties. Last but not least we provide well referenced solutions for centrifugal casting tubes, with filler metals matching the base material grades.

Oil and gas play an important role in the future global energy supply model. However, the emergence of new and unconventional sources of oil and gas will change the landscape with regard to extraction and processing in many significant ways. Upstream Oil & Gas refers to the search for crude oil and natural gas, followed by their recovery and production. This segment is also referred to as the Exploration and Production (E&P) sector; it includes the search for potential underground or sub-sea oil and gas

fields, the drilling of exploratory wells, and the subsequent drilling and operation of the wells that recover and bring the crude oil and/or raw natural gas to the surface. Downstream Oil & Gas refers to the refining and processing of the extracted oil and gas from both conventional and unconventional resources. This segment is also referred to as hydrocarbon processing and includes refineries, natural gas processing plants, Olefins and Aromatics as well as Methanol plants.



voestalpine Böhler Welding provides solutions driven by its high-quality welding consumables for safe, efficient, and cost-effective operation of upstream, midstream, and downstream facilities and equipment to these segments worldwide. These products are supplied by regional manufacturing, development, sales, and support units under a range of products that are recognized worldwide.

OIL & GAS DOWNSTREAM – WALKING ON THE EDGE OF STEEL LIMITS


Global demand for fuel products is increasing. The quality of petroleum compounds, such as crude oil or natural gas that is extracted in different geographical locations varies, and extra-heavy oil is playing a more significant role than in the past. More sources of unconventional oil and gas from oil sands and shale have been recently explored, and they have been receiving a great deal of attention. Today, environmental regulations with regard to fuels and petrochemical products have become more stringent.

All these variables put together a complicated function in front of the oil and gas “super-majors” to make top-quality products especially from extra-heavy feedstock, and still achieve a healthy margin. As shown in this road map derived from the key drivers, the main challenge in setting defined objectives and developing solutions is to maintain the integrity of the process component while dealing with a wide range of damage mechanisms.

These additional damage mechanisms are either related to the unconventional feedstock or enhanced service conditions. In recent years, steel manufacturers have been developing better steel grades to withstand such service conditions. One must take into consideration that steel products need to be welded or clad by weldoverlay; it is at this point that customers face the main welding challenges.

A good example is development of vanadium-enhanced Cr-Mo steels, which require special weld fabrication expertise. Welding consumables may seem to be a very small part of this industry, but almost all oil and gas downstream experts confirm that welding and welding technologies are the main drivers in the development of optimized process reactors and furnaces. The requirements for welding consumables in the downstream segment are generally considered to be more stringent than the conventional standard requirements for the same grades in other fields.

In the following, we will summarize the most important damage mechanisms in each of the three main plants. We will also be providing information about two of the major challenges: fabrication of hydroprocessing reactors (Page 8) and reforming / cracking furnaces (Page 13).

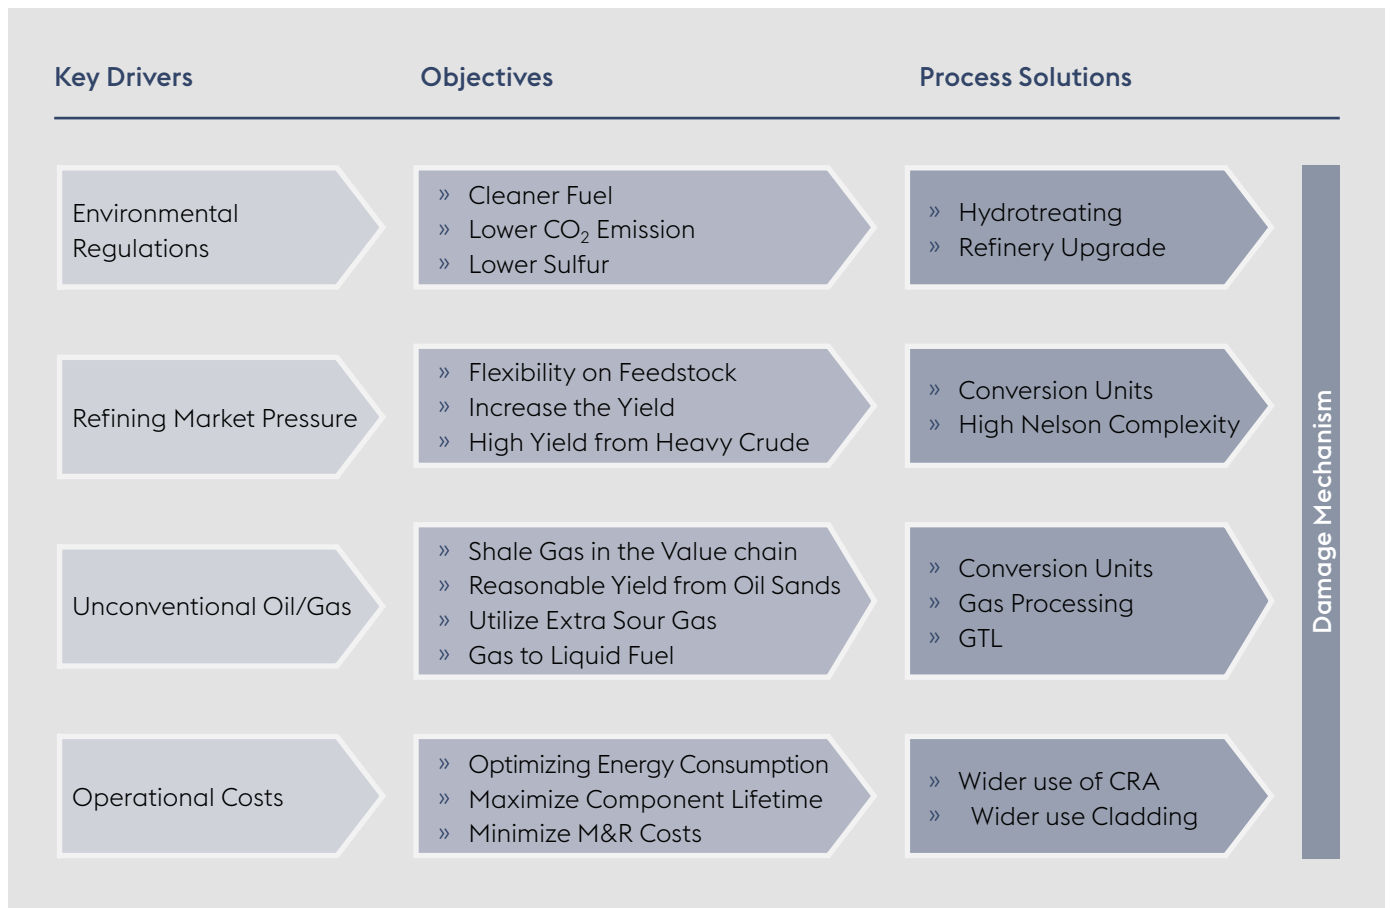

OIL REFINERIES

Hydrocarbon molecules come in many different sizes and shapes that generally depend on the quality of the crude oil. In an oil refinery, five different process categories are utilized to achieve both a higher yield and cleaner fuel.

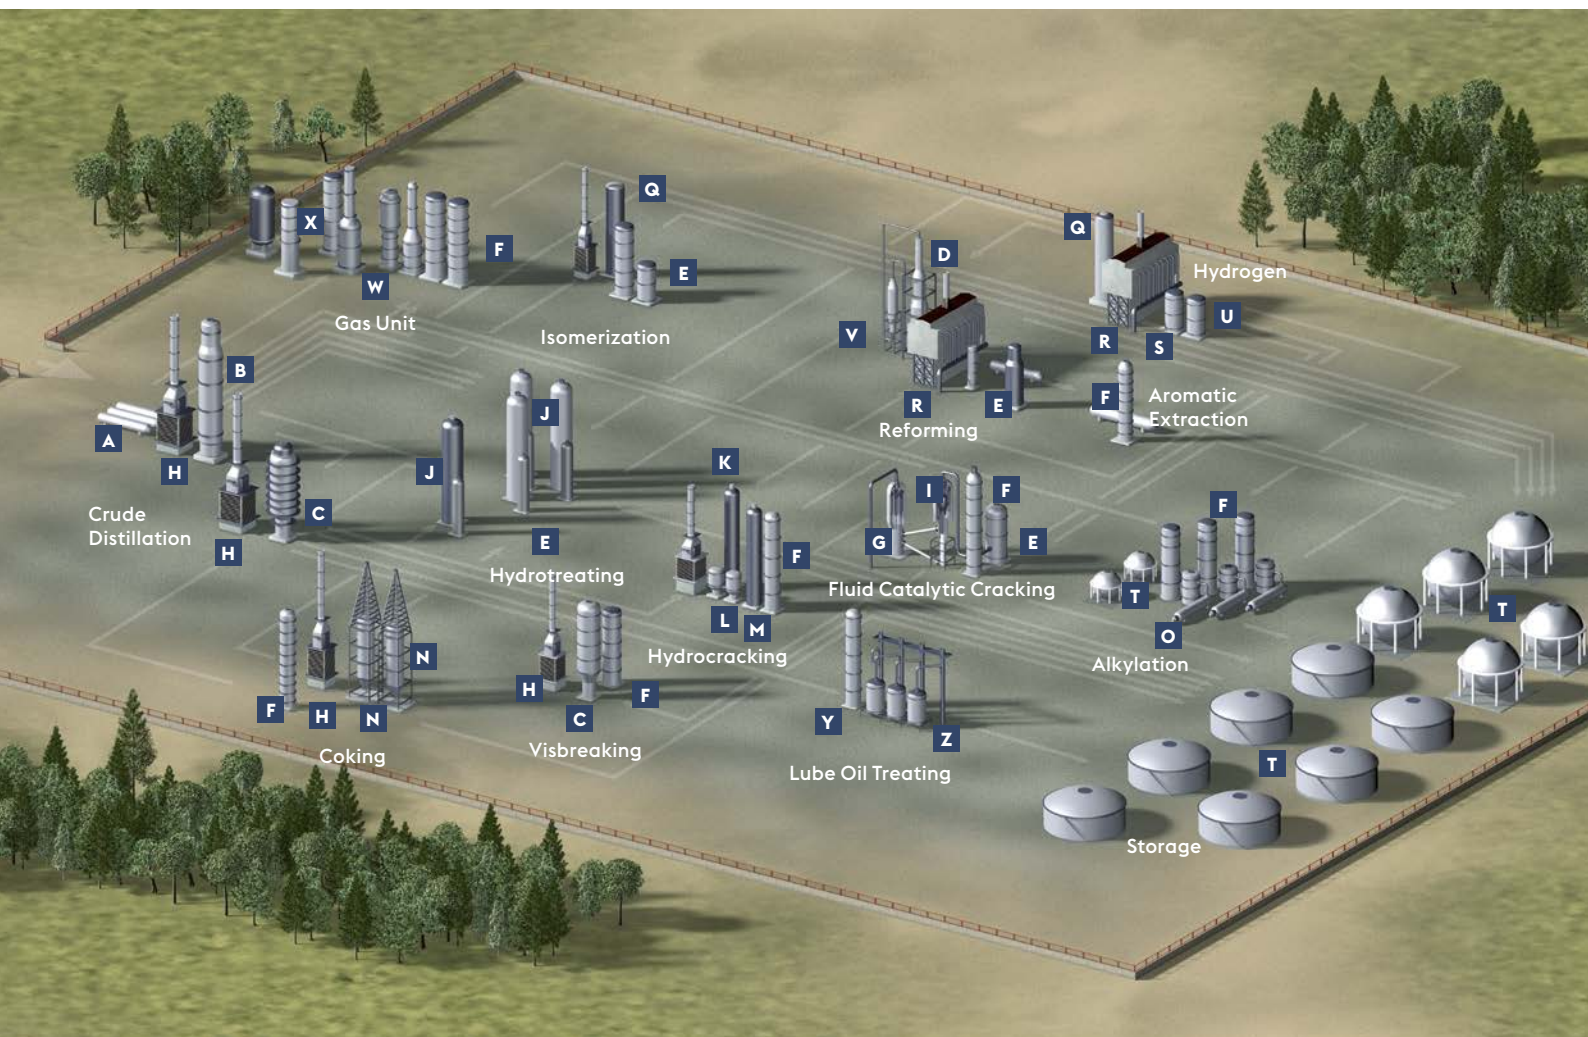


Table A: Alloy choices for major refinery components

Components		Joining Alloy Choices														Weld-Overlay Deposit Choices																		
		C-Mn	C- ½ Mo	1 ¼ Cr ½ Mo	2 ¼ Cr 1 Mo	2 ¼ Cr 1 Mo ¼ V	5 Cr ½ Mo	9 Cr 1 Mo	S.S 304H	S.S 310	Alloy 800 / 800H	Alloy HP / HP Nb	S.S 347	Alloy 600	Alloy 625	Alloy 825	Alloy 617	1% Ni	2.5% Ni	3% Ni	S.S 410S	S.S 308L	S.S 308H	S.S 316L	S.S 317L	S.S 347	Alloy 25-4 SMO	Alloy 276	Alloy 825	Alloy 625	Alloy 400	Alloy 200		
A	Desalter	.																				.					.							
B	Atmospheric Distillation Tower									
C	Vacuum Distillation Tower	.																																
D	Naphtha Reformer Reactor		.																															
E	Feed/Effluent Heat Exchanger
F	Fractionator
G	FCC Regenerator	.	.																				.											
H	Fired Heater							.	.																									
I	FCC Reactor			.	.																	.												
J	HDS Reactor									
K	Hydrocracking Reactor			.	.																				.									
L	Hot Separator			.																					.									
M	Cold Separator	.																					.											
N	Coke Drum		.																			.										.		
O	Alkylation Reactor
P	Post Heater/Furnace Piping																											
Q	Hydrogenation Reactor											
R	Steam Reformer Furnace									.	.																							
S	Low Temp. Shift Convertor	.																																
T	Storage Tanks															
U	High Temp. Shift Convertor		.																															
V	CCR Regenerator																							
W	Sulfur Recovery Piping											.	.	.																				
X	Sour Water Stripper	.																										.						
Y	Extraction Tower										
Z	Evaporator	.						.	.																									

- » Fractionating hydrocarbon molecules by size, e.g., in a crude distillation unit
- » Cracking larger molecules into smaller ones, e.g., in a fluid catalytic cracking unit or a hydrocracking unit
- » Combining smaller hydrocarbon molecules into larger molecules, e.g., in an alkylation unit
- » Changing the molecule shapes, e.g., in a catalytic reforming unit
- » Hydrotreating units are also needed to reduce sulfur, aromatics, nitrogen, oxygen, and metals while enhancing the combustion quality, density, and smoke point of fuels

Depending on the process, its feedstock and operating conditions, various damage mechanisms can pose a threat to the life cycle of a refinery, to equipment integrity, and to plant safety. Many of these damage mechanisms can directly or indirectly relate the quality of welding consumables and welding condition. Some of the major damage mechanisms are listed in this text.

The choices regarding the base material used for critical process equipment in a refinery as well as for weld-overlay cladding are limited. Some of these choices are listed in Table A, which refers directly to the relevant product for the target grade.

Table B: Damage mechanisms

Unit	Damage Mechanisms
Crude Distillation Unit	Sulfidation
	Wet H ₂ S Damage (Blistering/HIC/SOHIC/SCC)
	Creep / Stress Rupture
	Polythionic Acid Stress Corrosion
	Naphetic Acid Corrosion
	Ammonium Chloride Corrosion
	HCl Corrosion
	Caustic Corrosion / Cracking
	Erosion / Erosion-Corrosion
	Aqueous Organic Acid Corrosion
	Fuel Ash Corrosion

Unit	Damage Mechanisms
Gas Unit	Sulfidation
	Wet H ₂ S Damage (Blistering/HIC/SOHIC/SCC)
	Ammonium Bisulfid Corrosion
	Chloride SCC
	Flue Gas Dew Point Corrosion
	Amine Corrosion / Cracking
	Titanium Hybriding
	Sulfuric Acid Corrosion
Isomerization Unit	High Temperature Hydrogen Attack (HTHA)
	HCl Corrosion
	Caustic Corrosion / Cracking

Unit	Damage Mechanisms
Crude Distillation Unit	Sulfidation
	Wet H2S Damage (Blistering/HIC/SOHIC/SCC)
	Creep / Stress Rupture
	Polythionic Acid Stress Corrosion
	Naphetic Acid Corrosion
	Ammonium Chloride Corrosion
	HCl Corrosion
	Caustic Corrosion / Cracking
	Erosion / Erosion-Corrosion
	Aqueous Organic Acid Corrosion
	Fuel Ash Corrosion
Gas Unit	Sulfidation
	Wet H2S Damage (Blistering/HIC/SOHIC/SCC)
	Ammonium Bisulfid Corrosion
	Chloride SCC
	Flue Gas Dew Point Corrosion
	Amine Corrosion / Cracking
	Titanium Hybriding
	Sulfuric Acid Corrosion
Isomerization Unit	High Temperature Hydrogen Attack (HTHA)
	HCl Corrosion
	Caustic Corrosion / Cracking
Delayed Coking	Sulfidation
	Wet H2S Damage (Blistering/HIC/SOHIC/SCC)
	Creep / Stress Rupture
	Naphetic Acid Corrosion
	Ammonium Chloride Corrosion
	Ammonium Bisulfide Corrosion
	Thermal Fatigue
	Carburization
	Dealloying
	Carbonate SCC
Hydrotreating & Hydrocracking Unit	Sulfidation
	Wet H2S Damage (Blistering/HIC/SOHIC/SCC)
	High Temperature Hydrogen Attack
	High Temperature H2/H2S Corrosion
	Polythionic Acid Stress Corrosion
	Naphetic Acid Corrosion
	Creep / Stress Rupture
	Temper Embrittlement
	Ammonium Chloride Corrosion
	Ammonium Bisulfide Corrosion
	Amine Corrosion / Cracking
	Hydrogen Embrittlement
	Chloride Stress Corrosion Cracking
	Brittle Fracture
	Reheat Cracking

Unit	Damage Mechanisms
Visbreaking	Sulfidation
	Wet H2S Damage (Blistering/HIC/SOHIC/SCC)
	Polythionic Acid Corrosion
	Naphetic Acid Corrosion
	Ammonium
	Ammonium Chloride Corrosion
	Ammonium Bisulfide Corrosion
	Carburization
	Chloride SCC
	Creep / Stress Rupture
	Sour Water Corrosion
FCCU	Sulfidation
	Wet H2S Damage (Blistering/HIC/SOHIC/SCC)
	Creep / Stress Rupture
	Polythionic Acid Stress Corrosion
	Naphetic Acid Corrosion
	Ammonium Chloride Corrosion
	Thermal Fatigue
	Graphitization
	Temper Embrittlement
	Decarburization
	Carburization
	Reheat Cracking
Catalytic Reforming	High Temperature Hydrogen Attack
	HCl Corrosion
	Creep / Stress Rupture
	Temper Embrittlement
	Carburization
	Hydrogen Embrittlement
	Ammonia SCC
	Mechanical Fatigue
Metal Dusting	
Lube Oil	Phenol (Cabolic Acid) Corrosion
Alkylation	Caustic Corrosion / Cracking
	HF Acid Corrosion
	Erosion / Erosion-Corrosion
	Hydrogen Stress Corrosion HF
	Galvanic Corrosion
	Dissimilar Weld Metal (DMW) Cracking
Hydrogen Unit	High Temperature Hydrogen Attack (HTHA)
	Thermal Fatigue
	Temper Embrittlement
	Carbonate SCC
	Amine Corrosion / Cracking
	Chloride SCC
	Thermal shock
	Reheat Cracking
	CO ₂ Corrosion
	Metal Dusting

HYDROPROCESSING REACTORS

Production of cleaner fuels in accordance with current standards requires a refinery to use hydrotreating units to reduce sulfur, aromatics, nitrogen, oxygen, and metals while improving the combustion quality and smoke point of naphtha, diesel, and kerosene.

Hydrotreating / hydrodesulphurization (HDS) reactors are critical equipment in a hydrotreating unit.

In order to increase the refinery's yield rate, however, conversion units are needed to crack the vacuum gas oil (VGO) and the atmospheric gas oil (AGO) as well as the gas oil from the coker and the visbreaker units. This method enables the refinery to process the residual oil ("the bottom-of-the-barrel"). For example, hydrocracking is a catalytic cracking process that is assisted by the presence of hydrogen. In this case, hydrocracking reactors are the critical equipment.

The common element among hydroprocessing reactors of this type is the use of advanced 2.25Cr-1Mo-0.25V material, which has numerous merits over conventional grade material, including greater tensile strength at elevated temperatures,

enabling the industry to use reactors with lower wall thickness and weight (about 25% less weight). Additionally, it makes reactors less susceptible to damage mechanisms, such as temper embrittlement and high temperature hydrogen attack (HTHA) and last but not least, it provides stronger resistance to weld overlay disbonding induced by hot hydrogen.

Despite all these advantages, weld fabrication of reactors made of this grade of material ultimately becomes challenging due to various material sensitivities. e.g., weld cracking and re-heat cracking. Furthermore, intermediate and post-weld heat treatment as well as non-destructive examination (NDE) requires a different – and very precise – process compared to conventional 2.25Cr-1Mo grades. An example is the Time Of Flight Diffraction (TOFD) ultrasonic test.



Let's take a brief look at the welding of a hydroprocessing reactor:

B Nozzle welds

Piping nozzles, instrumentation nozzles, as well as the hand holes are critical areas as they are the only openings of the reactor and must thereby withstand conditions within the reactor. The conventional method represents the use of the SMAW process for the nozzle welds, but experienced fabricators currently use single-wire SAW. Due to the especially restrained condition of the joint, ISR (intermediate stress relieving) is of paramount importance.

D Weld overlay

The usual overlay deposit for such reactors is S.S 347. Depending on the accessibility and the cladding area, different processes are chosen:

Inside reactor: Strip cladding SAW, ESW 2 layer, ESW single layer, ESW high speed

Inside nozzles, fittings and restoration: FCAW, SMAW, GTAW

Weld-overlay build-up of the internal "supports": SMAW, GTAW. CrMo-22V FCAW 347

An important point to Cr-Mo 22V build up overlay is the necessity of ISR (intermediate stress relieving) due to restrained condition.

A Fabrication of the reactor shell


Depending on the design requirements and the wall thickness, shell material can be fabricated from plate or forged rings. If plates are used, they must be re-rolled and longitudinally welded to form a ring. A combination of both plate rings and forged rings is also possible, for example, forged rings for the quench zone and support skirt and plate rings for the rest of the shell arrangement. Narrow gap submerged arc welding (SAW), either with tandem or single wire, is the process of choice. With our wire/flux combination and the corresponding parameter setting, it is feasible to have the smallest possible opening, which significantly reduces the consumption of filler metals and welding time. A smaller amount of GTAW rod and SMAW electrode is also deposited.

Longitudinal Joints: ASME SA542 Gr. D CL 4a. ASME SA832 Gr. 22V

Circumferential Joints:

Forged rings: ASME SA336 Gr. F22V

Plate-fabricated rings: ASME SA832 Gr. 22V or ASME SA542 Gr. D, CL 4a

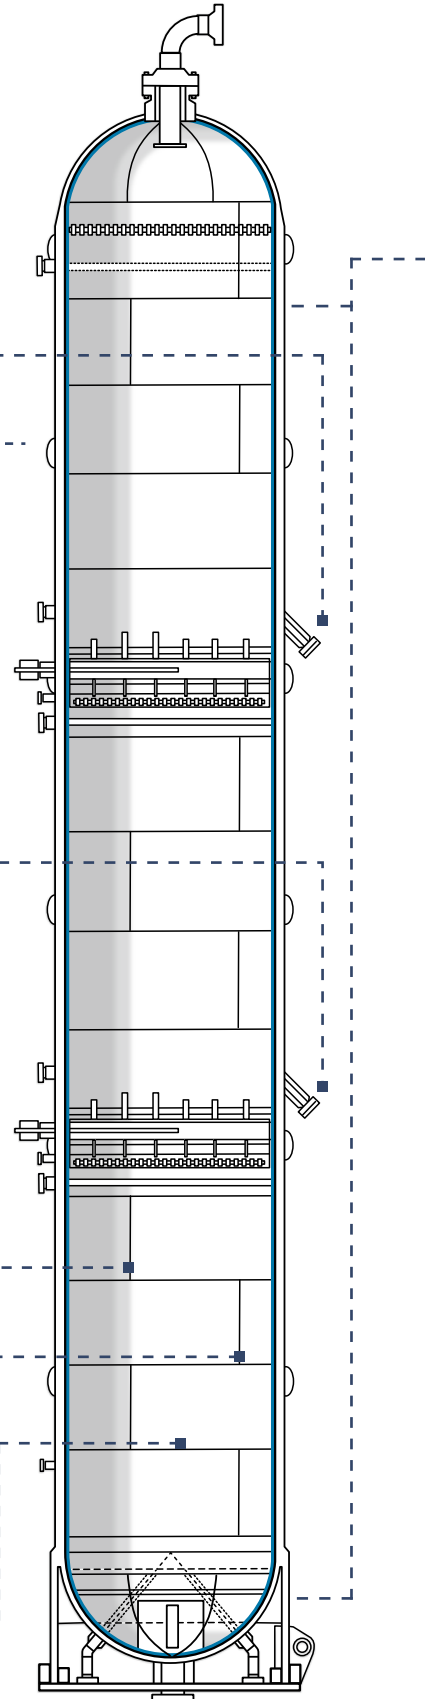

----- **C Shell to dished end / dished end to support welds**

Heads are either single-piece or multi-piece welded. Precise joint alignment is also needed as the dished end has a lower wall thickness compared to the shell. If forged profiles are used, skirt to bottom is sometimes a single forged piece.

E Heat treatment

DHT: Dehydrogenation heat treatment of 350° C for 4 hours is essential to minimize the susceptibility to cold cracking due to residual hydrogen in the weld.

ISR: Intermediate stress relieving is necessary, especially for highly restrained joints such as nozzle welds. The recommended temperature for ISR is 650 – 670° C for 4 hours to ensure a partial elimination of the residual stresses in the weld.

PWHT: Post weld heat treatment for CrMo-22V has a very narrow tolerance in comparison to conventional steel grades. The recommended PWHT is 705° C for 8 hours.

Max PWHT: Several heat treatments are applied during fabrication, including DHT, ISR, and final PWHT. Sometimes, repairs are undertaken during fabrication. An additional cycle should be planned for any necessary repairs after installation. A maximum PWHT condition, which has an equal effect of all previously cited PWHT cycles, must be simulated. To that end, and to define one PWHT condition that covers all cycles, the Hollomon parameter (HP) of all the PWHTs should be calculated and then for any given time a PWHT temperature can be calculated vice versa.

$$HP = (273^{\circ}C + T) \times (20 + \log_{10}(t/60))^{10-3}$$

$$T = 103 \cdot HP / (20 + \log_{10}(t/60)) - 273^{\circ}C$$

$$t = 60 \times 10^{(1000 \cdot HP / (273^{\circ}C + T) - 20)}$$



Step cooling: is done to simulate an accelerated embrittlement for evaluation of potential temper embrittlement.


F Reheat cracking and tramp elements

Since introduction of this material, the industry has encountered many difficulties due to reheat cracking after PWHT. With precisely controlled amount of the tramp elements (Typical X factor: 8 and typical K factor: 0.7), the reheat cracking problem is under control.

G Standard codes; recommended practices

ASME BPVC Section VIII Division 2, API RP 934A, API RP582, ASTM G146-01

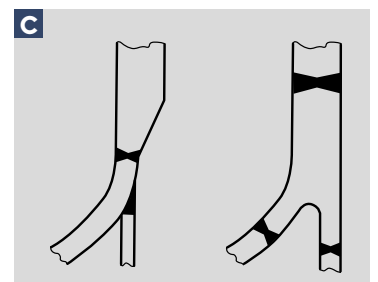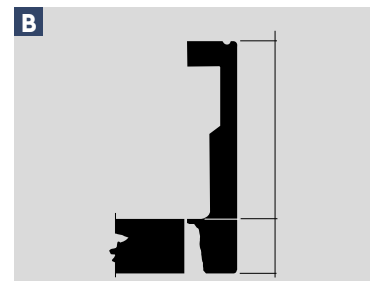

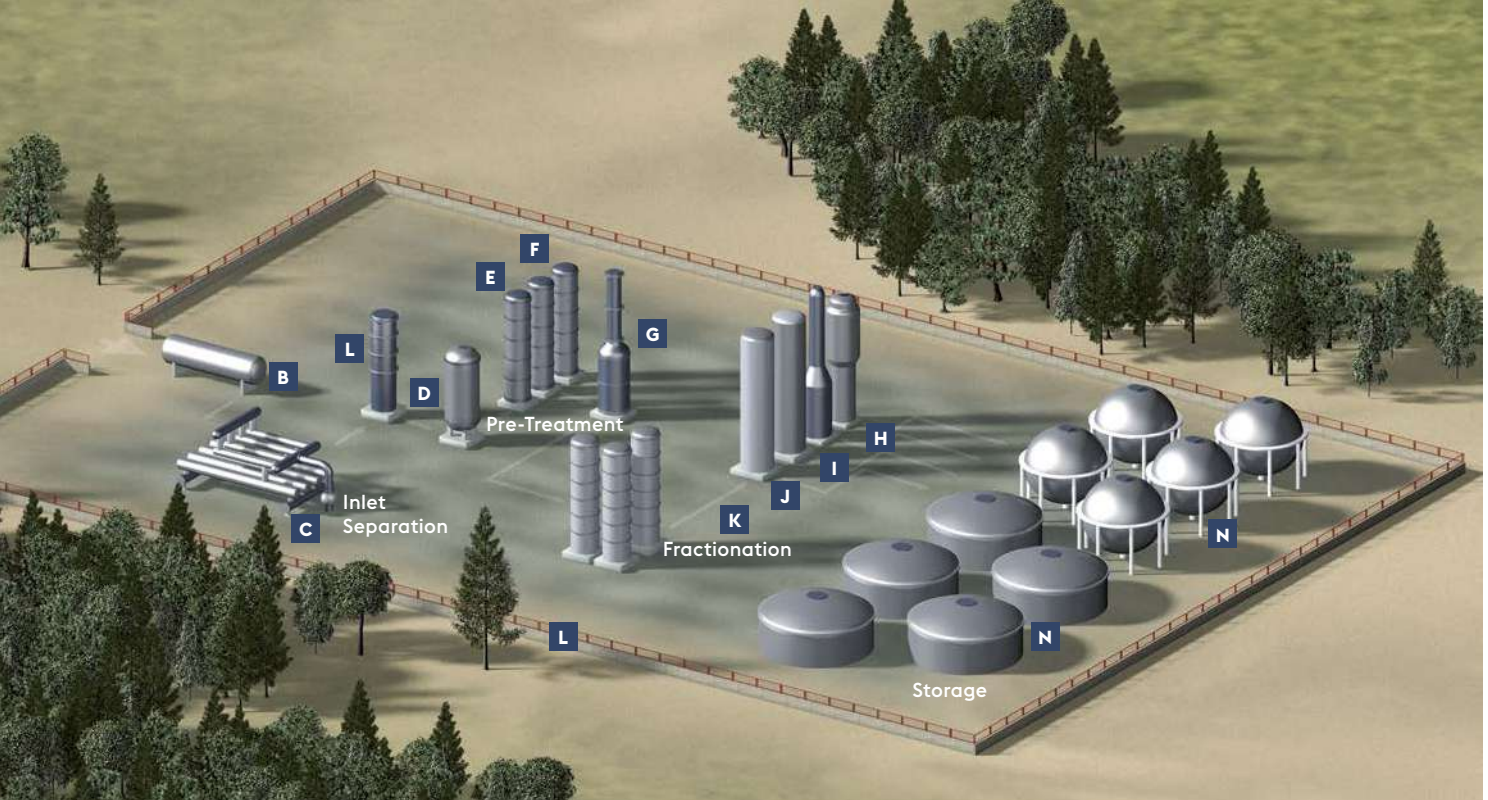

GAS PROCESSING

In the form it is extracted, natural gas cannot be used as fuel or feedstock. It needs to be treated in gas processing plants. Irrespective of whether a gas processing plant is constructed for a specific gas field or inside a refinery to process refinery gases, it generally contains:

The global gas resource landscape has changed significantly within the past decade. Unconventional gas, so called either due to its quality (sour and ultra-sour gas) or its source (shale gas, coal gas), has begun to play an important role. As such, there is a need for different solid or weld overlaid corrosion resistance alloys in different separators and fractionators. Examples are the injection lines, inlet separators, and slug catcher manifold / drums in which – depending on the sourness of the gas – S.S 316L, Alloy 825, or Alloy 625 weld overlay is applied.

Selection of the base material can also vary depending on the operating pressure or job site temperature. Use of carbon steel as well as low alloy / chrome-molly alloys is possible depending on the operating conditions.

Inlet facilities: To separate natural gas from water and impurities. These facilities can also include slug catcher manifold/drum

Pre-treatment: To remove sulfur, H₂O, Hg, and CO₂ from natural gas

Fractionation: To fractionate different gaseous and NGL hydrocarbons

Table D: Alloy choices for main gas processing components


Components		Joining Alloy Choices								Weld-Overlay Deposit Choices								
		C-Mn	1 ¼ Cr ½ Mo	2¼ Cr 1Mo	S.S 316L	Alloy 625	1% Ni	2.5% Ni	3% Ni	Alloy 22	S.S 308L	S.S 316L	S.S 317L	Alloy 254 SMO	Alloy 276	Alloy 825	Alloy 625	Alloy 22
A	Sour Gas Injection Pipes			•														
B	Slug Catcher Drum	•									•		•				•	
C	Slug Catcher Manifold	•									•		•				•	
D	Inlet Separator	•									•		•		•	•		
E	Sour Water Stripper	•																
F	Dehydrator	•																
G	Amine Regenerator	•										•					•	
H	De-Methanizer	•			•							•					•	
I	De-Ethanizer	•			•							•						
J	De-Propanizer	•																
K	De-Butanizer	•																
L	Fractionator	•								•								
M	Sulfur Recovery Line	•			•	•										•	•	
N	Storage Tanks	•					•	•	•									
O	Flue Gas Desulphurization								•									•

In Table D, we have listed some of the critical process equipment in a gas processing plant. A number of the major damage mechanisms in a typical gas processing plant are listed in Table C. Some of these damage mechanisms can be controlled by selecting high-quality base material and welding consumables.

Table C: Damage mechanisms

Unit	Damage Mechanism
Inlet Facilities	Wet H ₂ S Blistering
	Wet H ₂ S HIC
	Wet H ₂ S SOHIC
	Wet H ₂ S SCC
	Slugging
	Amine Degradation Corrosion
Pre-Treatment	Sulfidation
	Wet H ₂ S damage (Blistering/HIC/SOHIC/SCC)
	Ammonium Bisulfide
	Alkaline SCC
	Erosion / Erosion-Corrosion
	Amine Cracking
	Amine Corrosion
	CO ₂ Corrosion
	Chloride Stress Corrosion Cracking
	Titanium Hybridizing
	Sulfuric Acid
	Mercury Attack Corrosion
	Flue Gas Dew Point Corrosion



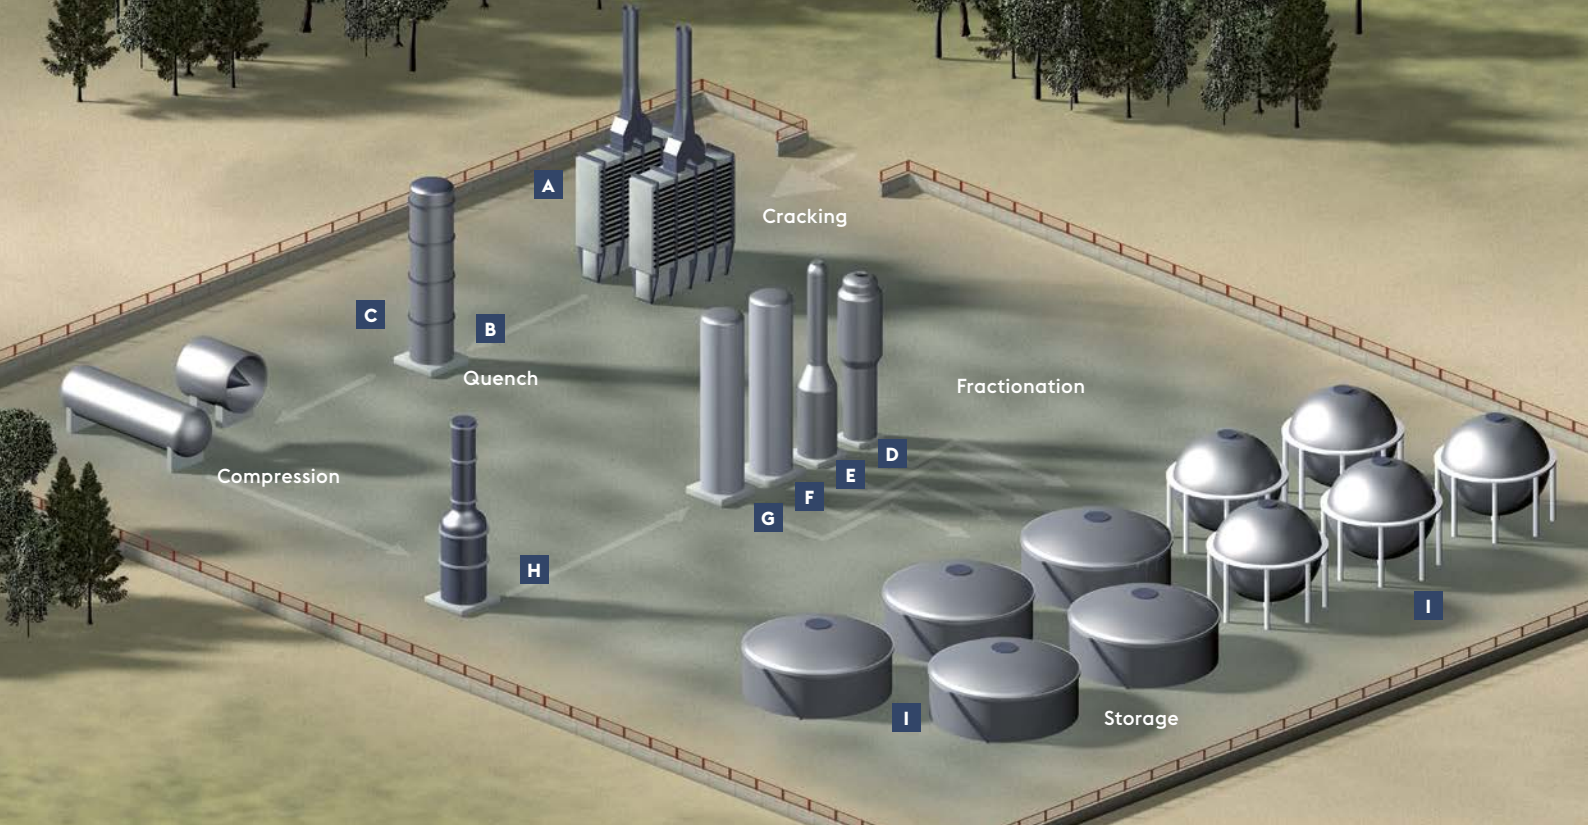

OLEFINS AND AROMATICS

Olefins (such as Ethylene and Propylene) and Aromatics (Benzene, Toluene, and Xylene) are key products in the petrochemical industry. Naphtha from the oil refinery enters the cracking furnace and is cracked by being heated to 1,150°C. The cracked hydrocarbon enters the quench oil / water columns. The gases are then compressed and liquefied in different temperatures down to -150°C.

A cracker furnace represents the heart of a plant (a description follows on the next page). voestalpine Böhler Welding draws upon many years of experience in the production of filler metals for welding the cracker furnace tubes. A plant has both high-temperature parts and low-temperature areas. Various hydrocarbons have very low boiling temperatures and therefore, low-temperature steel grades are needed for transport and storage of these materials within the plant. Some cryogenic products are listed in the products table of this brochure. However, all the LPG- and LNG-related products are separately described in our LNG/ LPG brochure.

In Table F, we have listed some of the critical process equipment in an Olefin / Aromatic plant. A number of the major damage mechanisms from typical olefins/aromatics are listed in Table G. Some of these damage mechanisms can be controlled by selecting high-quality base material and welding consumables.

Table F: Alloy choices for main olefin/aromatic plant components

Components	Joining Alloy Choices											Weld-Overlay Deposit Choices		
	C-Mn	Alloy 35 / 45 Nb	5Cr 1/2Mo	9Cr 1Mo	S.S 316L	S.S 347	S.S 310	S.S304H	1% Ni	2.5% Ni	3% Ni	S.S 308L	S.S 316L	Alloy 625
A	Cracking Furnace	•												
B	Post Furnace Piping		•	•		•	•	•						
C	Quench Column	•										•	•	
D	De-Methanizer	•				•							•	•
E	De-Ethanizer	•				•							•	•
F	De-Propanizer	•												
G	De-Butanizer	•												
H	Ethylene Oxide Reactor	•												
I	Storage Tanks								•	•	•			

Table E: Steel choices for cryogenic application

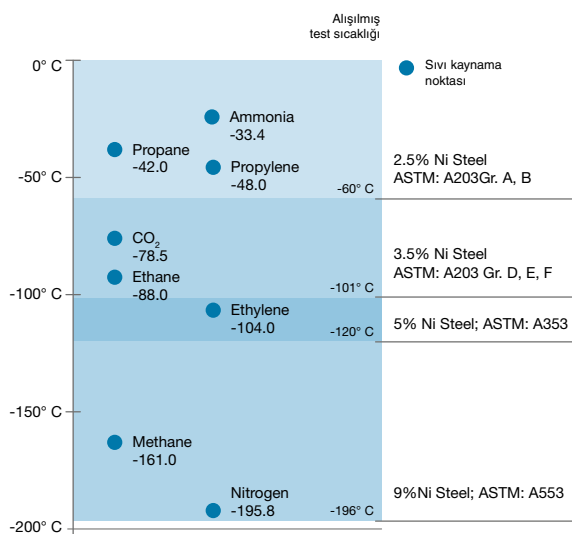


Table G: Damage mechanisms

Unit	Damage Mechanism
Cracking	Creep / Stress Rupture
	Carburization
	Temper Embrittlement
	Thermal Shock
	Graphitization
	Thermal Fatigue
	Caustic Corrosion
	Caustic Crack
Quench	Caustic Corrosion
Fractionation	Caustic Crack
	Low Temperature Embrittlement

WELDING OF REFORMER AND CRACKER TUBES

In petroleum refining, there is the demand for a steam / catalytic reforming process that reforms the hydrocarbon molecule to a desired shape. This process is also used for hydrogen production in the hydrogen unit of large-scale refineries, where very large amounts of process hydrogen are needed. The operating temperature can exceed 900°C.

In petrochemical plants, e.g., in Olefin and Aromatic plants, naphtha from the refinery first enters into a cracker, the heart of the plant. The temperature in the cracker furnace can exceed 1,150°C. The cracking process leaves coke on the tube walls, which results in higher temperatures that can reach the operational limits.


In both of the above-mentioned applications, centrifugally cast tubes represent the main element of the process. The tubes and the respective welded joints must be able to withstand numerous damage mechanisms, including but not limited to creep / stress rupture, carburization, and fatigue. Being able to balance increased strength, higher creep resistance, and greater toughness has been a challenge for the industry.

Over decades, the industry has benefited from the introduction of new alloys with various Cr and Ni content and the addition of alloying elements, such as Si, Ti, Zr, Nb, Mo, Co, etc. to create the ability to withstand higher operating

temperatures and, at the same time, to reach reasonable creep strength and carburization resistance.


Over-alloyed welding consumables have always been available in our portfolio, but similar or matching consumables for every new tube grade have been what we offer in order to minimize the difference between the thermal expansion coefficient in the weld joint and the tube; this enables a longer life cycle of the welded tubing.

A list of the main products for the welding of furnace tubes is provided in the product section of this brochure.

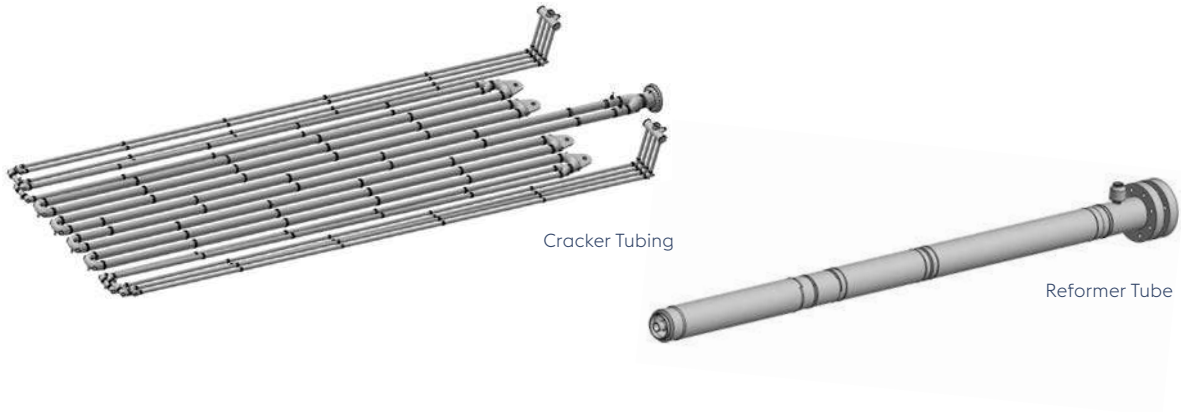

© Manoir Industries

Table H: Cast tube alloy evolution

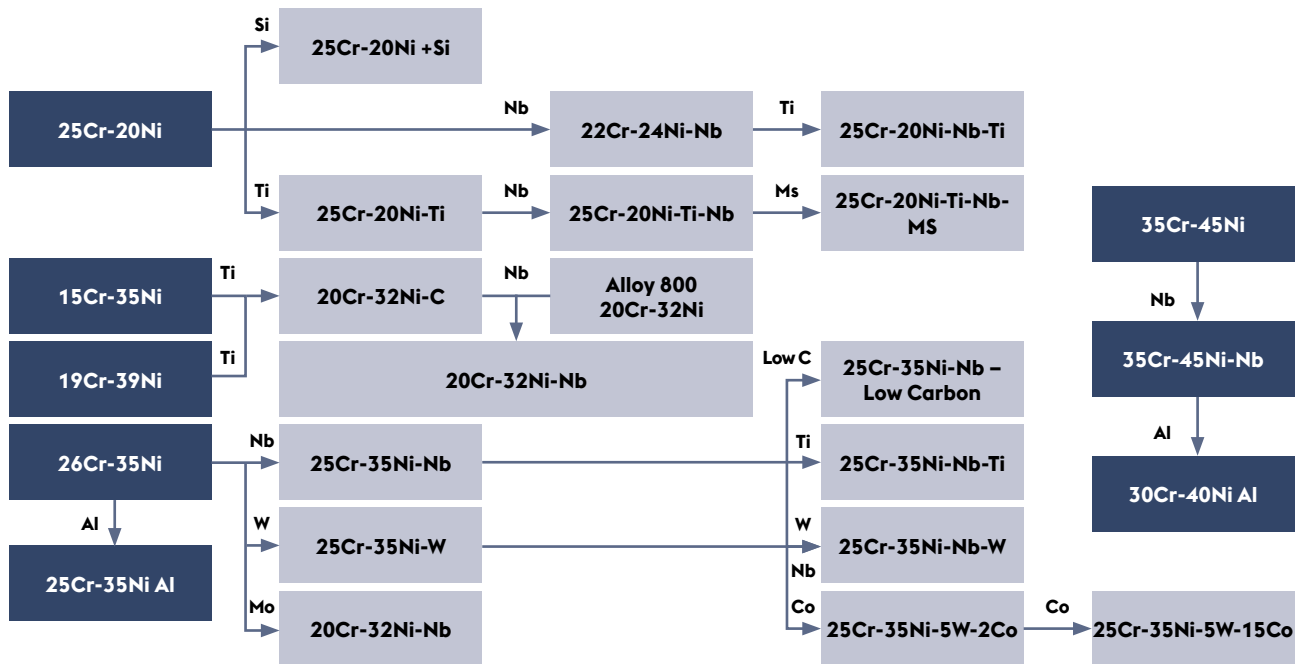

REFERENCES



HELPE Refinery Greece

Fabricator name: Larsen and Toubro
 Component: Hydrocracking Reactor (970 MT)
 Base material: CrMo-22V (292mm)
 Joining products: SMAW: Phoenix Chromo 2V
 GTAW: Union I CrMo 2V
 SAW wire: Union S1 CrMo 2V
 SAW Flux: UV 430 TTR-W



Burgas Refinery Bulgaria

Fabricator name: Belleli Energy CPE S.r.L
 Component: Hydroprocessing Reactors
 Base material: CrMo-22V + S.S 347 (240 + 3mm)
 Joining products: SMAW: Phoenix Chromo 2V
 GTAW: Union I CrMo 2V
 SAW wire: Union S1 CrMo 2V
 SAW Flux: UV 430 TTR-W
 Cladding Products: Strip: Soudotape 21.11 LNb,
 Flux: Record EST 122



Mina Abdullah and Mina Al-Ahmadi Refinery Kuwait

Fabricator name: Larsen and Toubro
 Component: 22 Hydroprocessing Reactors
 Base material: CrMo 22, CrMo-22V
 Joining products: SMAW: Phoenix SH Chromo 2 KS, Phoenix Chromo 2V
 GTAW: Union I CrMo 910 Spezial, Union I CrMo 2V
 SAW wire: Union S1 CrMo 2, Union S1 CrMo 2V
 SAW Flux: UV 420 TTR-W, UV 430 TTR-W

This is a short list of some of our partners:

ATB Riva Calzoni SpA
 Axens
 Bechtel
 Belleli Energy C.P.E S.r.l
 Borsig GmbH
 CB&I Lummus
 Cessco Fabrication and Engineering
 Chevron
 Chiyoda
 CNPC
 Daelim
 Doncaster Paralloy Ltd.
 Doosan Engineering and Construction

Duralloy Technologies
 ExxonMobil
 FBM Hudson Italiana
 Felguera Calereria Pesada
 Fluor
 Foster Wheeler
 GE - Nuovo Pignone
 General Welding Wroks Inc.
 Godrej and Boyce
 Haldor Topsoe
 Hitachi Zosen
 Hyundai Heavy Industries
 ISGEC
 Japan Steel Works

KBR
 Koch Industries
 Kubota Metal Corporation
 Larsen and Toubro
 Lurgi
 MAN DWE GmbH
 Manoir Industries
 Officine Luigi Resta S.p.A
 OLMI
 OMZ
 PETROBRAS
 Reliance Industries
 Rolle S.p.A
 Samsung Engineering
 Schmidt + Clemens GmbH

Schwartz Houtmont
 Shanghai Boiler Works
 Shell Global Solutions
 SINOPEC
 Taylor Forge Engineering Products
 Technip
 Tecnicas Reunidas
 TOTAL Raffinage
 Thyssenkrupp Uhde
 UOP
 V.R.V
 Winkels
 Worley Parsons

Joining 1/6

	Alloy Group	Base Material Examples	Welding Process	Product Name	Classification AWS/EN			
Unalloyed Steels	C-Mn	Plate: ASME SA516 GR. 55 Plate: ASME SA516 GR. 60 Plate: ASME SA516 GR. 65 Plate: ASME SA516 GR. 70 Forged: ASME SA181 Gr. F1 Pipe: ASME SA105 Gr. A, B, C Pipe: ASME SA106 Gr. A, B, C Tube: ASME SA210 Gr. A, B, C	SMAW	BÖHLER FOX EV 47	AWS A5.1: E7016-1H4R EN ISO 2560-A: E 38 4 B 42 H5			
				BÖHLER FOX EV 50	EN ISO 2560-A: E 42 5 B 42 H5 AWS A5.1: E7018-1H4R			
			SAW Wire	Union S 2 Si	AWS A5.17 EM12K EN ISO 14171 S2Si			
			SAW Flux	UV 418 TT	EN ISO 14174 SA FB 1 55 AC H5			
			SAW Wire+Flux	Union S 2 Si + UV 418 TT	AWS A5.17-SFA 5.17 F7A6-EM12K EN ISO 14171-S 42 5 FB S2Si			
			SAW Wire	Union S 3 Si + UV 418 TT	AWS A5.17 EH12K EN ISO 14171 S3Si			
			SAW Flux	UV 418 TT	- EN Iso 14174 SA FB 1 55 AC H5			
			SAW Wire+Flux	Union S 3 Si + UV 418 TT	AWS A5.17-SFA 5.17 F7A8-EH12K EN ISO 14171-S 46 6 FB S3Si			
			GTAW	BÖHLER EMK 6	AWS A5.18: ER70S-6 EN ISO 636-A: W 42 5 W3Si1			
				BÖHLER EML 5	AWS A5.18 ER70S-3 EN ISO 636-A: W 46 5 W2Si			
			GMAW	BÖHLER EMK 6	AWS A5.18: ER70S-6 EN ISO 14341-A: G3Si1 (wire)/ G 42 4 M21 3Si1			
			FCAW	BÖHLER Ti 52-FD	AWS A5.36: E71T-1M21A4-CS1-H8 E71T-1-C1A2-CS1-H4 EN ISO 17632-A: T 46 4 P M 1 H10 EN ISO 17632-A T 42 2 P C 1 H5			
			Low-alloyed Pressure Vessel Steels	C- ½ Mo	Plate: ASME SA571 Gr. J Fitting: ASME SA 234 WP1, WP1 Forging: ASME SA336 Gr. F1 Forged Fitting: ASME SA 182 Gr. F1 Pipe: ASME SA 335 Gr. P1 Tube: ASME SA 250 Gr. T1a, T1b Tube: ASME SA209 Gr. T1 Tube: EN10216-2: 16Mo3	SMAW	BÖHLER FOX DMO Kb	AWS A5.5: E7018-A1H4R EN ISO 2560-A: E Mo B B 42 H5
						SAW Wire	Union S 2 Mo	AWS A5.23 EA2 EN ISO 14171 S2Mo / EN ISO 24598-A S S Mo
SAW Flux	UV 418 TT	- EN ISO 14174 SA FB 1 55 AC H5						
SAW Wire+Flux	Union S 2 Mo + UV 418 TT	AWS A5.23-SFA 5.23 F8A6-EA2-A2 EN ISO 14171 S46 4 FB S2Mo						
GTAW	BÖHLER DMO-IG	AWS A5.28: ER70S-A1 (ER80S-G) EN ISO 21952-A: W Mo Si						
GMAW	BÖHLER DMO-IG	AWS A5.28: ER70S-A1 (ER80S-G) EN ISO 21952-A: G Mo Si						

Joining 2/6

	Alloy Group	Base Material Examples	Welding Process	Product Name	Classification AWS/EN	
Low-alloyed Pressure Vessel Steels			FCAW	BÖHLER DMO TI-FD	AWS A5.36: E81T1-M21PY-A1H8 EN ISO 17634-A: T MoL P M 1 H10	
	1 ¼ Cr ½ Mo 1 Cr ½ Mo	Plate: ASME SA387 Gr. 11 Gr. 12 Fitting: ASME SA 234 WP11, WP12 Forging: ASME SA336 Gr. F11 Forged Fitting: ASME SA 182 Gr. F11, F12 Pipe: ASME SA 335, P11, P12 Tube: ASME SA 213 T11, T12	SMAW	Phoenix Chromo 1	AWS A5.5 E8018-B2 EN ISO 3580-A ECrMo1 B 4 2 H5	
			SAW Wire	Union S 2 CrMo	AWS A5.23 EB2R EN ISO 24598-A S S CrMo1	
			SAW Flux	UV 420 TTR	- EN ISO 14174 SA FB 1 65 DC	
				UV 420 TTR-W	- EN ISO 14174 SA FB 1 65 AC	
			SAW Wire+Flux	Union S 2 CrMo + UV 420 TTR(-W)	AWS A5.23-SFA 5.23 F8P2-EB2R-B2 EN ISO 24598-A S S CrMo1 FB	
			GTAW	Union I CrMo	AWS A5.28 ER80S-G [ER80S-B2 (mod.)] EN ISO 21952-A W CrMo1Si EN ISO 21952-B W 55 1CM3	
				Union ER 80S-B2	AWS A5.28 ER80S-B2 EN ISO 21952-B W 1CM	
	Low-alloyed Pressure Vessel Steels	2 ¼ Cr 1 Mo	Plate: ASME SA387 Gr. 22 Fitting: ASME SA 234 WP22 Forging: ASME SA336 Gr. F22 Forged Fitting: ASME SA 182 Gr. F22 Pipe: ASME SA 335, P22 Tube: ASME SA213 Gr. T22	SMAW	Phoenix SH Chromo 2 KS	AWS A5.5 E9015-B3 EN ISO 3580-A ECrMo2 B 4 2 H5 EN ISO 3580-B E 6215-2C1M
				SAW Wire	Union S 1 CrMo 2	AWS A5.23 EB3R EN ISO 24598-A S S CrMo2
SAW Flux				UV 420 TTR	- EN ISO 14174 SA FB 1 65 DC	
				UV 420 TTR-W	- EN ISO 14174 SA FB 1 65 AC	
SAW Wire+Flux				Union S1 CrMo 2 + UV 420 TTR(-W)	AWS A5.23-SFA 5.23 F9P2-EB3R-B3R	
GTAW				Union I CrMo 910 Spezial	AWS A5.28 ER90S-G	
				Union ER 90S-B3	AWS A5.28 ER90S-B3 EN ISO 21952-B W 2C1M	
2 ¼ Cr 1 Mo ¼ V		Plate: ASME SA542 Type D, CL 4a Plate: ASME SA832 Gr. 22V Forging: ASME SA336 Gr. F22V, SA541 Gr. 22V Forged Fitting: ASME SA 182 Gr. F22V	SMAW	Phoenix Chromo 2V	AWS A5.5 E9015-G EN ISO 3580-A E ZCrMoV2 B 4 2 H5	
			SAW Wire	Union S 1 CrMo 2V	AWS A5.23 EG EN ISO 24598-A S S Z CrMoV2	

Joining 3/6

	Alloy Group	Base Material Examples	Welding Process	Product Name	Classification AWS/EN
			SAW Flux	UV 430 TTR-W	- EN ISO 14174 SA FB 1 57 AC
			SAW Wire+Flux	Union S1 CrMo 2V + UV 430 TTR-W	AWS A5.23 F9PZ-EG-G EN ISO 24598-A S S Z CrMo 2V FB
			GTAW	Union I CrMo 2V	AWS A5.28 ER90S-G
Medium-alloyed High Temperature Steels	5 Cr ½ Mo	Plate: ASME SA387 Gr. 5 CL. Fitting: ASME SA 234 WP5 Forging: ASME SA336 Gr. F5 Forged Fitting: ASME SA 182 Gr. F5 Pipe: ASME SA335 Gr. P5 Tube: ASME SA213 Gr. T5	SMAW	BÖHLER FOX CM 5 Kb	AWS A5.5: E8018-B6H4R EN ISO 3580-A: ECrMo5 B 4 2 H5
			SAW Wire	Union S1 CrMo 5	AWS A5.23 EB6 EN ISO 24598-A S S CrMo5
			SAW Flux	UV 420 TT	- EN ISO 14174 SA FB 1 65 AC
	9 Cr 1 Mo	Plate: ASME SA387 Gr. 9 Fitting: ASME SA234 WP9 Forging: ASME SA336 Gr. F9 Forged Fitting: ASME SA 182 Gr. F9 Pipe: ASME SA335 Gr. P9 Tube: ASME SA213 Gr. T9	GTAW	BÖHLER CM 5-IG	AWS A5.28: ER80S-B6 EN ISO 21952-A: W CrMo5Si
			GMAW	BÖHLER CM 5-IG	AWS A5.28: ER80S-B6 EN ISO 21952-A: G CrMo5Si
			SMAW	BÖHLER FOX CM 9 Kb	AWS A5.5: E8018-B8 EN ISO 3580-A: ECrMo9 B 4 2 H5
			GTAW	BÖHLER CM 9-IG	AWS A5.28 ER80S-B8 EN ISO 21952-A G CrMo9Si
Heat Resistant Stainless Steels	S.S 304H	UNS30409	SMAW	Thermanit ATS 4	AWS A5.4 E308H-15 EN ISO 3581-A E 19 9 H B 2 2
			SAW Wire	Thermanit ATS 4	AWS A5.9 ER19-10H EN ISO 14343 S 19 9 H
			SAW Flux	Marathon 104	EN ISO 14174 SA FB 2 55 AC H5
			SAW Wire+Flux	Thermanit ATS 4 + Marathon 104	AWS A5.9 ER19-10H EN ISO 14343 S 19 9 H
			GTAW	Thermanit ATS 4	AWS A5.9 ER19-10H EN ISO 14343-A W 19 9 H / EN ISO 14343-B SS19-10H
			GMAW	Thermanit ATS 4	AWS A5.9 ER19-10 H EN ISO 14343-A G 19 9 H / EN ISO 14343-B SS19-10H

Joining 4/6

	Alloy Group	Base Material Examples	Welding Process	Product Name	Classification AWS/EN	
Heat Resistant Stainless Steels	S.S 304H	UNS30409	FCAW	BÖHLER E 308 H PW-FD Bi-Free	AWS A5.22: E308HT1-1/4 EN 17633-A: T Z 19 9 H P C1/M21 1	
	S.S 310	UNS31000	SMAW	Thermanit C	AWS A5.4 E310-15 (mod.) EN ISO 3581-A E25 20 B 2 2	
			GTAW	Thermanit C Si	AWS A5.9 ER310 (mod.) EN ISO 14343-A W 25 20 Mn / EN ISO 14343-B SSZ31	
			GMAW	Thermanit C Si	AWS A5.9 ER310 (mod.) EN ISO 14343-A G 25 20 Mn	
High Temperature High-alloyed	Wrought: Alloy 800	UNS8800	SMAW	UTP 2133 Mn	- EN ISO 3581-A: EZ 21 33 B 4 2	
	Alloy 800H	UNS8810	GTAW	UTP A 2133 Mn	- EN ISO 14343: WZ 21 33 Mn Nb	
	Alloy 800HT	UNS8811	GMAW	UTP A 2133 Mn	- EN ISO 14343: GZ 21 33 Mn Nb	
	Cast Tubes: Alloy HK		SMAW	UTP 2535 Nb	- EN 1600: EZ 25 35 Nb B 6 2	
	Alloy HP		GTAW	UTP A 2535 Nb	- EN ISO 14343-A: WZ 25 35 Zr	
	Alloy HP Nb		GMAW	UTP A 2535 Nb	- EN ISO 14343-A: GZ 25 35 Zr	
	Alloy HP M.A					
	Cast Tubes Alloy 35/45	GX45NiCrNbSiTi 45-35	SMAW	UTP 3545 Nb	- EN 1600: EZ 35 45 Nb B 6 2	
	Alloy 35/45 M.A		GTAW	UTP A 3545 Nb	- EN ISO 14343-A: WZ 35 45 Nb	
			GMAW	UTP A 3545 Nb	- EN ISO 14343-A: GZ 35 45 Nb	
	Stainless Steel	Austenitic	S.S 309L Only Weld-Overlay Buffer	SMAW	BÖHLER FOX CN 23/12	AWS A5.4: E309L-17 EN ISO 3581-A: E 23 12 L R 3 2
				SAW Wire	Thermanit 25/14 E309L	AWS A5.9 ER309L EN ISO 14343 S 23 12 L
SAW Flux				Marathon 431	 EN ISO 14174 SA FB 2 64 DC	
GTAW				BÖHLER CN 23/12-IG	AWS A5.9: ER309L EN ISO 13343-A: G 23 12 L	
GMAW				Thermanit 25/14 E309L Si	AWS A5.9 ER 309 L Si EN ISO 14343-A G 23 12 L Si	

Joining 5/6

	Alloy Group	Base Material Examples	Welding Process	Product Name	Classification AWS/EN
Stainless Steel			FCAW	BÖHLER CN 23/12-FD	AWS A5.22: E309LT0-4/1 EN 17633-A: T 23 12 L R M21 (C1) 3
	Austenitic Nb Stabilized	S.S 321/347	SMAW	BÖHLER FOX SAS 2	AWS A5.4: E347-15 EN ISO 3581-A: E 19 9 Nb B 2 2
			SAW Wire	Thermanit H-347	AWS A5.9 ER347 EN ISO 14343 S 19 9 Nb
			SAW Flux	Marathon 431	EN ISO 14174 SA FB 2 64 DC
			GTAW	BÖHLER SAS 2-IG	AWS A5.9: ER347 EN ISO 13343-A: W 19 9 Nb
			GMAW	Thermanit H-347	AWS A5.9 ER 347 EN ISO 14343-A G 19 9 Nb / EN ISO 14343-B SS347
				Thermanit H Si	AWS A5.9 ER 347Si EN ISO 14343-A G 19 9 Nb Si / EN ISO 14343-B SS347Si
			FCAW	BÖHLER SAS 2-FD	EN ISO 17633-A: T 19 9 Nb R M21/C1 3 AWS A5.22: E347T0-4/1
Nickel-base	Alloy 600	UNSN06600	SMAW	UTP 068 HH	AWS A5.11 : E NiCrFe-3 (mod.) EN ISO 14172 : E Ni 6082 (NiCr20Mn3Nb)
			GTAW	UTP A 068 HH	AWS A5.14 : ER NiCr-3 EN ISO 18274 : S Ni 6082 (NiCr20Mn3Nb)
			GMAW	UTP A 068 HH	AWS A5.14 : ER NiCr-4 EN ISO 18274 : S Ni 6082 (NiCr20Mn3Nb)
	Alloy 625 Alloy 825	UNS06625 UNS08825	SMAW	UTP 6222 Mo	AWS A5.11 : E NiCrMo-3 EN ISO 14172 : E Ni 6625 (NiCr22Mo9Nb)
			GTAW	UTP A 6222 Mo	AWS A5.14 : ER NiCrMo-3 EN ISO 18274 : S Ni 6625 (NiCr22Mo9Nb)
			GMAW	UTP A 6222 Mo	AWS A5.14 : ER NiCrMo-4 EN ISO 18274 : S Ni 6625 (NiCr22Mo9Nb)
	Alloy 617	UNS06617	SMAW	UTP 6170 Co	AWS A5.11 : ~ ENiCrCoMo-1 (mod.) EN ISO 14172 : ~ E Ni 6117~ (NiCr22Co12Mo)
			GTAW	UTP A 6170 Co	AWS A5.14 : ER NiCrCoMo-1 EN ISO 18274 : S Ni 6617 (NiCr22Co12Mo9)
			GMAW	UTP A 6170 Co	AWS A5.14 : ER NiCrCoMo-2 EN ISO 18274 : S Ni 6617 (NiCr22Co12Mo9)

Joining 6/6

	Alloy Group	Base Material Examples	Welding Process	Product Name	Classification AWS/EN
Low-temperature Steels	1% Ni	ASME SA572 Gr. 65 ASME SA573	SMAW	BÖHLER FOX EV 60	AWS A5.5 E8018-C3H4R EN ISO 2560-A E 46 6 1Ni B 42 H5
			SAW Wire	Union S 3 NiMo 1	AWS A5.23 EF3 EN ISO 14171 S3NiMo1
			SAW Flux	UV 420 TT(R)	- EN ISO 14174 SA FB 1 65 DC
			GTAW	BÖHLER Ni1-IG	AWS A5.28 ER80S-Ni1 (mod.) EN ISO 636-A W3Ni
			GMAW	BÖHLER NiMo1-IG	AWS A5.28 ER90S-G EN ISO 16834-A G Mn3Ni1Mo (wire) / G 55 6 M21 Mn3Ni1Mo
	2-2.5% Ni	ASME SA203 Gr. A & B ASME SA572 Gr. 65	SMAW	BÖHLER FOX 2,5 Ni	AWS A5.5 E8018-C1H4R EN ISO 2560-A E 46 8 2Ni B 42 H5
			SAW Wire	Union S 2 Ni 2,5	AWS A5.23 ENi2 EN ISO 14171 S2Ni2
			SAW Flux	UV 418 TT, UV 421 TT	- EN ISO 14174 SA FB 1 55 AC H5
			SAW Wire+Flux	Union S 2 Ni 2,5 + UV 418 TT	AWS A5.23-SFA 5.23 F8A10-ENi2-Ni2 EN ISO 14171 S 46 8 FB S2Ni2
			GTAW	BÖHLER 2,5 Ni-IG	AWS A5.28 ER80S-Ni2 EN ISO 636-A W2Ni2 / W 46 8 W2Ni2
			GMAW	BÖHLER 2,5 Ni-IG	AWS A5.28 ER80S-Ni2 (wire) / G 46 8 M/C G2Ni2 EN ISO 14341-A G2Ni2
	3.5% Ni	ASME SA203 Gr. D, E, F	SMAW	Phoenix SH Ni 2 K 80	AWS A5.5 E7018-C2L EN ISO 2560-A E 42 6 3Ni B 3 2 H5
			SAW Wire	Union S 2 Ni 3,5	AWS A5.23 ENi3 EN 756 S2Ni3
			SAW Flux	UV 418 TT	- EN ISO 14174 SA FB 1 55 AC H5
			SAW Wire+Flux	Union S 2 Ni 3,5 + UV 418 TT	AWS A5.23-SFA 5.23 F8A15-ENi3-Ni3 EN ISO 14171 S 46 8 FB S2Ni3
GTAW			Union I 3,5 Ni	AWS A 5.23 ER80S-Ni3 (mod.) EN 1668 W Z42 10 W2Ni3	

Strip Cladding

	Deposited Alloy	Welding Process	Layer	Strip	Flux
Stainless Steel	S.S 410S	SAW	1 st Layer	SOUDOTAPE 430	RECORD INT 101
		ESW	1 st Layer	SOUDOTAPE 430	RECORD EST 122
	S.S 308L	SAW	1 st Layer	SOUDOTAPE 309 L	RECORD INT 109
			2 nd Layer	SOUDOTAPE 308 L	RECORD INT 109
		ESW	1 st Layer	SOUDOTAPE 309 L	RECORD EST 122
			2 nd Layer	SOUDOTAPE 308 L	RECORD EST 122
		ESW Single layer	Single Layer	SOUDOTAPE 308 L	RECORD EST 308-1
	ESW High Speed	1 st Layer	SOUDOTAPE 309 L	RECORD EST 136	
	S.S 308H	SAW	1 st Layer	SOUDOTAPE 309 L	RECORD INT 101
			2 nd Layer	SOUDOTAPE 308 L	RECORD EST 136
	S.S 316L	SAW	1 st Layer	SOUDOTAPE 309 L	RECORD INT 109
			2 nd Layer	SOUDOTAPE 316 L	RECORD INT 109
		ESW	1 st Layer	SOUDOTAPE 309 L	RECORD EST 122
			2 nd Layer	SOUDOTAPE 316 L	RECORD EST 122
		ESW Single layer	Single Layer	SOUDOTAPE 21.13.3 L	RECORD EST 122
		ESW High Speed	1 st Layer	SOUDOTAPE 309 L	RECORD EST 136
	2 nd Layer		SOUDOTAPE 316 L	RECORD EST 136	
	S.S 317L	SAW	1 st Layer	SOUDOTAPE 21.13.3 L	RECORD INT 101 Mo
			2 nd Layer	SOUDOTAPE 316 L	RECORD INT 101 Mo
		ESW	1 st Layer	SOUDOTAPE 316 L	RECORD EST 317-2
			2 nd Layer	SOUDOTAPE 316 L	RECORD EST 317-2
		ESW Single layer	Single Layer	SOUDOTAPE 21.13.3 L	RECORD EST 317-1
		S.S 347	SAW	1 st Layer	SOUDOTAPE 309 L
	2 nd Layer			SOUDOTAPE 347	RECORD INT 109
	ESW		1 st Layer	SOUDOTAPE 309 L	RECORD EST 122
			2 nd Layer	SOUDOTAPE 347	RECORD EST 122
	ESW Single layer		Single Layer	SOUDOTAPE 21.11 LNb	RECORD EST 122
	ESW High Speed		Single Layer	SOUDOTAPE 24.12 LNb	RECORD EST 136
	ESW High Speed		1 st Layer	SOUDOTAPE 309 L	RECORD EST 136
			2 nd Layer	SOUDOTAPE 347	RECORD EST 136
Alloy 254 SMO	ESW	1 st Layer	SOUDOTAPE 254SMo	RECORD EST 122	
		2 nd Layer	SOUDOTAPE 254SMo	RECORD EST 122	
	ESW	1 st Layer	SOUDOTAPE 309L	RECORD EST 122	

Strip Cladding

	Deposited Alloy	Welding Process	Layer	Strip	Flux
Nickel-Base	Alloy 276	ESW	1 st Layer	SOUDOTAPE NiCrMo59	RECORD EST 259
			2 nd Layer	SOUDOTAPE NiCrMo4	RECORD EST 259
	Alloy 59	ESW	1 st Layer	SOUDOTAPE NiCrMo59	RECORD EST 259
			2 nd Layer	SOUDOTAPE NiCrMo59	RECORD EST 259
	Alloy 825	ESW	1 st Layer	SOUDOTAPE 825	RECORD EST 201
			2 nd Layer	SOUDOTAPE 825	RECORD EST 201
		ESW Single layer	Single Layer	SOUDOTAPE 825	RECORD EST 138
	Alloy 625	SAW	1 st Layer	SOUDOTAPE 625	RECORD NFT 201
			2 nd Layer	SOUDOTAPE 625	RECORD NFT 201
		ESW	1 st Layer	SOUDOTAPE 625	RECORD EST 201
			2 nd Layer	SOUDOTAPE 625	RECORD EST 201
		ESW Single layer	Single Layer	SOUDOTAPE 625	RECORD EST 625-1
		ESW High Speed	1 st Layer	SOUDOTAPE 625	RECORD EST 236
	2 nd Layer		SOUDOTAPE 625	RECORD EST 236	
	Alloy 400	SAW	1 st Layer	SOUDOTAPE NiCu7	RECORD NiCuT
			2 nd Layer	SOUDOTAPE NiCu7	RECORD NiCuT
			3 rd Layer	SOUDOTAPE NiCu7	RECORD NiCuT
		ESW	1 st Layer	SOUDOTAPE NiCu7	RECORD EST 400
	2 nd Layer		SOUDOTAPE NiCu7	RECORD EST 400	
	Alloy 200	SAW	1 st Layer	SOUDOTAPE NiTi	RECORD NiT
2 nd Layer			SOUDOTAPE NiTi	RECORD NiT	
3 rd Layer			SOUDOTAPE NiTi	RECORD NiT	
ESW		1 st Layer	SOUDOTAPE NiTi	RECORD EST 200	
		2 nd Layer	SOUDOTAPE NiTi	RECORD EST 200	
		3 rd Layer	SOUDOTAPE NiTi	RECORD EST 200	
Alloy 22	ESW	1 st Layer	SOUDOTAPE NiCrMo22	RECORD EST 259	
		2 nd Layer	SOUDOTAPE NiCrMo22	RECORD EST 259	

JOIN! voestalpine Böhler Welding

With over 100 years of experience, voestalpine Böhler Welding is the global top address for the daily challenges in the areas of joint welding, repair, hardfacing and cladding as well as brazing. Customer proximity is guaranteed by more than 40 subsidiaries in 25 countries, with the support of 2,200 employees, and through more than 1,000 distribution partners worldwide. With individual consultation by our application technicians and welding engineers, we make sure that our customers master the most demanding welding challenges. voestalpine Böhler Welding offers three specialized and dedicated brands to cater our customers' and partners' requirements.



Lasting Connections – As a pioneer in innovative welding consumables, Böhler Welding offers a unique product portfolio for joint welding worldwide. More than 2000 products are adapted continuously to the current industry specifications and customer requirements, certified by well-respected institutes and thus approved for the most demanding welding applications. As a reliable partner for customers, “lasting connections” are the brand’s philosophy in terms of both welding and people.



Tailor-Made Protectivity™ – UTP Maintenance ensures an optimum combination of protection and productivity with innovative and tailor-made solutions. Everything revolves around the customer and their individual requirements. That is expressed in the central performance promise: Tailor-Made Protectivity™.



In-Depth Know-How – As a leading brand of soldering and brazing consumables, Fontargen Brazing offers proven solutions based on 50 years of industrial experience, tried and tested processes and methods. This In-Depth Know-How has made Fontargen Brazing an internationally preferred partner for every soldering and brazing task.

The Management System of voestalpine Böhler Welding Group GmbH, Peter-Mueller-Strasse 14-14a, 40469 Duesseldorf, Germany has been approved by Lloyd’s Register Quality Assurance to: ISO 9001:2015, ISO 14001:2015, OHSAS 18001:2007, applicable to: Development, Manufacturing and Supply of Welding and Brazing Consumables. More information: www.voestalpine.com/welding



